


# 10BASE-T, 100BASE-TX, 1000BASE-T Ethernet Application

## Ethernet Decoding, Triggering, and Compliance Testing Software Datasheet

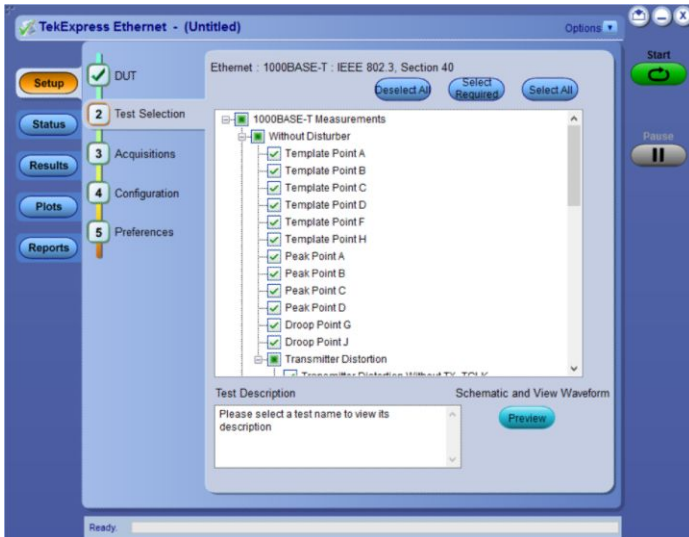

Get more visibility into your Ethernet designs with 10BASE-T, 100BASE-TX, and 1000BASE-T physical layer measurement and analysis on the DPO/MSO70000C/DX/SX, DPO7000C, and DPO/MSO5000 Series Oscilloscopes. The combination of the oscilloscope, TekExpress Ethernet (CMENET3) compliance test software, and a wide range of available analog probes enables you to perform detailed and accurate validation of your designs. Along with the physical layer tests, the Ethernet test solution also offers insight into the protocol layer (Option SR-ENET on the DPO/MSO70000C/DX/SX, DPO7000C, and DPO/MSO5000 Series Oscilloscopes and Option DPO4ENET on the MDO4000 Series Oscilloscopes).

### Key features

- CMENET3 TekExpress Ethernet compliance test application
  - Comprehensive Ethernet PHY test coverage supporting multiple speeds
  - Highly optimized and intuitive user interface for quick test configuration and validation of electrical signals
  - Compliance testing and margin testing for accurate analysis and improved interoperability
  - Time-domain and frequency-domain measurements can be made with a single instrument
  - Jitter and timing measurements can be configured with and without filters
  - Amplitude and droop testing for transmitter performance
  - Detailed test reports with measurement results, pass/fail status, test margin, and test specific waveform images
  - Configure test parameters and limits for debug and characterization
  - Configure multiple test runs and analyze the results
  - Preview of test mode waveform before running the tests
  - Additional Peak Distortion vs. Phase Offset and Error Values vs. Number plots for 1000BASE-T distortion tests
- SR-ENET Ethernet protocol trigger and analysis
  - Automated trigger (MSO/DPO5000 Series only), decode, and search for 10BASE-T and 100BASE-TX Ethernet standards
  - Designed for use with MSO/DPO5000, DPO7000C, and DPO/MSO70000C/DX/SX Series Oscilloscopes
- DPO4ENET Ethernet protocol trigger and analysis
  - Automated trigger, decode, and search for 10BASE-T and 100BASE-TX Ethernet standards
  - Designed for use with MDO4000 Series Oscilloscopes

### Applications


- 10BASE-T Ethernet
- 100BASE-TX Ethernet
- 1000BASE-T Ethernet

## CMENET3 Automated Ethernet physical layer compliance testing

Ethernet compliance testing has some unique measurement challenges:

- Generating disturbing signals: You need tools to generate pattern data and noise which provide real-world noise for return loss measurements.
- Each Ethernet variant requires return loss, and template tests:
  - The 10BASE-T standard requires 22 tests per port with fault tolerance and CMRR
  - The 100BASE-TX standard requires 12 tests per port with CMRR
  - The 1000BASE-T standard requires 80 tests per port with BER, and CMRR
- The large number of individual tests with compliance testing requires more setup and measurement time. This makes it difficult to achieve repeatable measurement results quickly.
- Performing return loss measurements using a vector network analyzer can be expensive. Tektronix' patented method uses an Arbitrary Function Generator (AFG) and oscilloscope, which is cost-effective and accurate.


Frequency	Spec. Value	85Ohm	100Ohm	115Ohm	Result	Comments
1MHz	-16dB	-20.63dB	-29.76dB	-22.92dB	Pass	
10MHz	-16dB	-19.5dB	-30.89dB	-25.95dB	Pass	
20MHz	-16dB	-20.31dB	-32.97dB	-24.39dB	Pass	
30MHz	-16dB	-19.24dB	-28.59dB	-25.27dB	Pass	
40MHz	-16dB	-18.63dB	-27.35dB	-26.83dB	Pass	
50MHz	-14.08dB	-17.47dB	-23.73dB	-24.99dB	Pass	
60MHz	-12.5dB	-16.36dB	-21.71dB	-25.29dB	Pass	
70MHz	-11.16dB	-14.79dB	-19.05dB	-23.25dB	Pass	
80MHz	-10dB	-13.73dB	-17.49dB	-21.75dB	Pass	
90MHz	-8.98dB	-12.34dB	-15.57dB	-19.64dB	Pass	
100MHz	-8.06dB	-10.2dB	-12.59dB	-15.41dB	Pass	

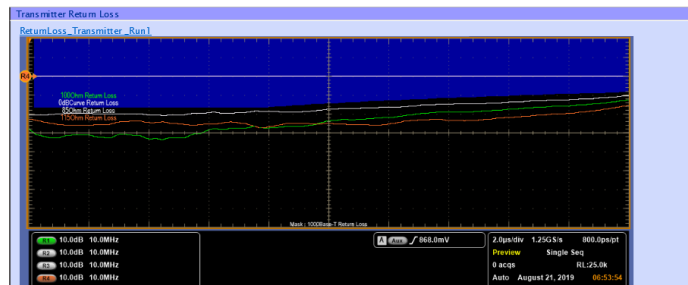

85Ω/100Ω/115Ω plots with margin table for the 1000BASE-T return loss measurement.

## Automated Ethernet physical layer tests

To ensure the information transmission over a network is reliable, industry standards specify requirements for a network's physical layer. The CMENET3 Ethernet Compliance Test Software automates Ethernet physical layer tests for 10BASE-T, 100BASE-TX, and 1000BASE-T in compliance with IEEE 802.3-2000 and ANSI X3.263-1995 standards. The portfolio of tests includes core PMA and MDI tests such as Template, Distortion, Return Loss, Jitter, and Common Mode Voltage.

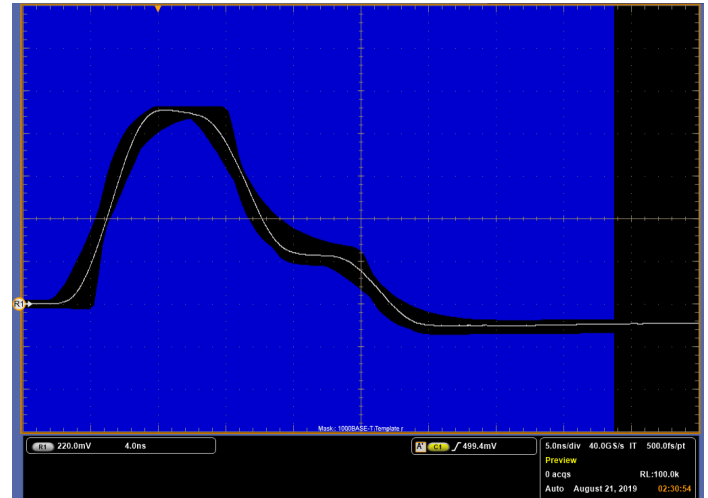

1000 BASE-T template test (without Disturber) at point A.

## Amplitude domain tests

The industry standards require signals to have amplitudes within specified ranges to assure interoperability between the devices. The amplitude tests vary with signal speeds but include parameters such as peak or peak-to-peak amplitude, overshoot, common-mode voltage, and positive/negative pulse symmetry.

## Return loss test

The return loss of the cabling system can also affect interoperability. The standards define the minimum amount of attenuation, of the reflected signal relative to the incident signal. The return loss test measures the impedance, typically over the range of 100 Ω ±15%. The TekExpress Ethernet application ingeniously performs the return loss test for 85, 100, and 115 Ω (111 Ω for 10BASE-T) impedances as prescribed by the standards.

## Time domain tests


Timing parameters of the signals are also specified by the standards. The tests include timing measurements such as rise time, fall time, and difference or symmetry between rise and fall times.

### Jitter tests

Jitter tests quantify the timing variations of the edges of the signal using specified test patterns. The jitter measurements include the contributions from duty cycle distortion and baseline wander. Jitter is determined by accumulating waveforms and measuring the width of the accumulated points at the eye crossing. The peak-to-peak jitter is inferred from minimum and maximum values in the tails of the histogram for 10BASE-T and 100BASE-TX, and from leveraging Time Interval Error (TIE) method for 100BASE-TX and 1000BASE-T.

### Template tests

Template mask tests are often used to quickly verify that the transmitted signal meets industry-standard requirements. These template masks are defined so that the signal distortions such as overshoot, jitter, incorrect rise and fall times, etc., will cause the mask test to fail. An example of a 100BASE-TX template mask test is shown below.

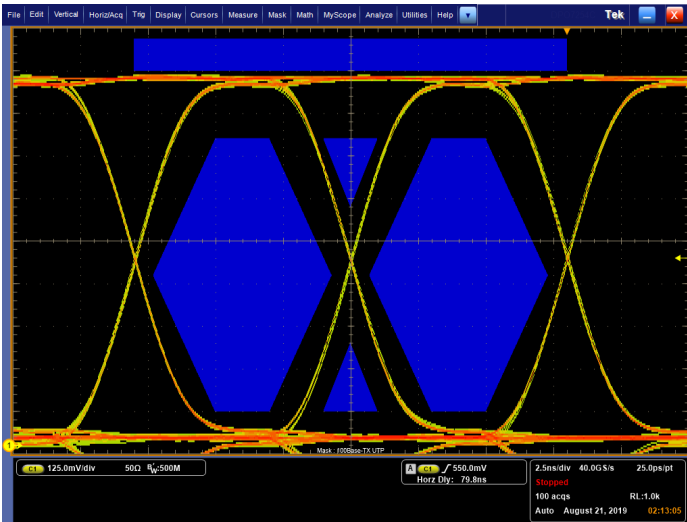

Positive side AOI template test of 100BASE-TX signal.

### Test report generation

TekExpress Ethernet allows you to quickly validate measurements and generate a detailed report with test results, waveform images, and setup details at the end of every execution.

**TekExpress Ethernet**  
 10BASE-T Test Report

Setup Information				Scope Information			
DUT ID	DUT001	Scope F/W Version	DPO7104C, QU0007	Date/Time	2019-08-26 06:37:35	Return Loss Signal Generator	10.10.1 Build 10
Device Type	Ethernet	DATA Probe Model	TDP3500	TekExpress Ethernet Version	10.2.0.33	DATA Probe Serial Number	8013850
TekExpress Framework Version	4.11.0.45	Overall Test Result	Pass	Overall Execution Time	0:12:32	DUT COMMENT: General comment	

Test Name	Summary Table
TP_IDL_Load1(TPM)	Pass
TP_IDL_Load2(TPM)	Pass
TP_IDL_Load3(TPM)	Pass


  

Measurement Details	Measured Value	Test Result	Margin	Low Limit	High Limit	Units	Comments
TP_IDL_Load1 With Twisted Pair cable_Run1	0	Pass	H:1	N.A	1	Hits	No Hits
COMMENTS: MaskSelection: Both <a href="#">Back to Summary Table</a>							
TP_IDL_Load2(TPM)							
Measurement Details	Measured Value	Test Result	Margin	Low Limit	High Limit	Units	Comments
TP_IDL_Load2 With Twisted Pair cable_Run1	0	Pass	H:1	N.A	1	Hits	No Hits
COMMENTS: MaskSelection: Both <a href="#">Back to Summary Table</a>							
TP_IDL_Load3(TPM)							
Measurement Details	Measured Value	Test Result	Margin	Low Limit	High Limit	Units	Comments
TP_IDL_Load3 With Twisted Pair cable_Run1	1	Pass	H:0	N.A	1	Hits	Hits in Head segments: ['1','2','0'] Hits in Tail segments: ['1','0','2','0']
COMMENTS: MaskSelection: Both <a href="#">Back to Summary Table</a>							
TP_IDL_Load1 With Twisted Pair cable_Head1							
TP_IDL_Load1 With Twisted Pair cable_Tail1							

Sample 10BASE-T test report file.

## Test fixtures

The TF-GBE Series of test fixtures supports the Ethernet compliance tests, providing convenient signal access and test points for accurate removal of disturbing signals, return loss calibration, and cross-connect circuits to connect to traffic generators and link partners. The TF-GBE-BTP is a basic test package for 10BASE-T, 100BASE-TX, and 1000BASE-T tests. The TF-GBE-ATP is an advanced test package which also includes a 1000BASE-T jitter test channel cable.

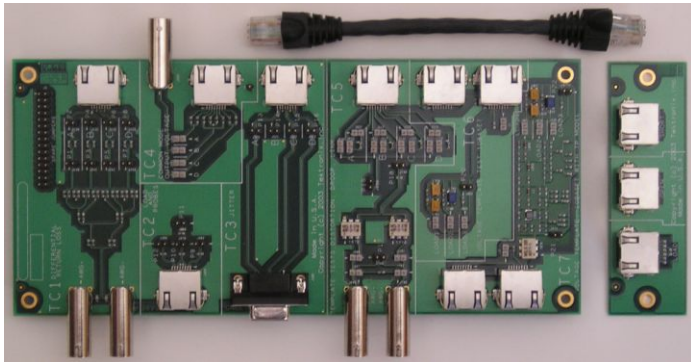

TF-GBE-BTP basic ethernet test fixture.

## Complete solution for receiver stress testing

The TekExpress Ethernet application offers a complete solution for creating and managing disturbing signals for accurate receiver stress testing. Tektronix Arbitrary Waveform Generators (AWG) and Arbitrary Function Generators (AFG) provide support for adding and removing noise-related elements of the disturbing signal.

## Protocol Trigger and Analysis using Option SR-ENET and DPO4ENET

Debugging Ethernet-based embedded designs presents some complex measurement and analysis challenges:


- Capturing specific Ethernet addresses and data from a live stream of protocol messages
- Displaying the elements of the ethernet message in an understandable format for engineers and technicians
- Time-correlating Ethernet messages with analog and digital signals in an embedded system
- Capturing long time windows of Ethernet traffic and then finding specific events within the acquired data

The Ethernet protocol analysis application provides a robust set of tools for debugging embedded systems with 10BASE-T and 100BASE-TX Ethernet, including:


- Automated serial decode and search for Ethernet 10BASE-T and 100BASE-TX
- Serial triggering on all the critical elements of Ethernet 10BASE-T and 100BASE-TX packets
- Decoding of IPv4 internet protocol and TCP transport protocol
- Decoding of all the elements of each message.
- Searching with user-defined criteria through long acquisitions to find specific messages
- Results table display of decoded serial bus activity in a tabular format with time stamps for a quick summary of system activity

## 10BASE-T and 100BASE-TX packet details

The oscilloscope displays the details of the packets captured for 10BASE-T and 100BASE-TX standards. You can also view the details of all captured packets in a tabular view. The packets are time stamped and are listed consecutively with columns for each component (Time, Destination Address, Source Address, Length, Data, FCS/CRC, and Errors).

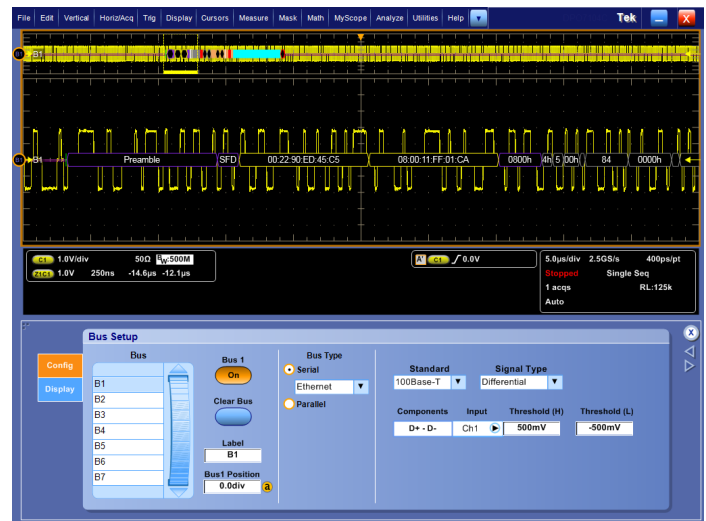

Color-coded display of 100BASE-TX, showing preamble, MAC addresses, IP header, and TCP header components of a serial signal.

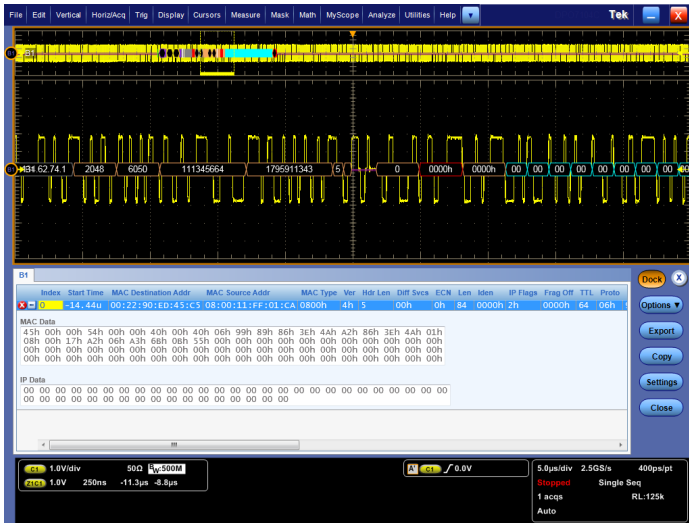

100BASE-TX decoded event table displaying the packet information with time stamp.

### 10BASE-T and 100BASE-TX search


Trigger On allows users to select an event of interest in the packet and analyze the data. In the past, users had to manually identify errors by scrolling through waveform counts and converting them into bits. The Ethernet protocol analysis application enables the oscilloscope to search through the acquired data for user-defined criteria including the packet content. Each occurrence is highlighted by a search mark. Rapid navigation between marks is as simple as pressing the Previous (←) and Next (→) buttons on the oscilloscope front panel.




Automated search in wave inspector finds all specified bus elements. The image displays the 6 start-of-frame events in the acquisition.

### DPO4ENET – 10BASE-T and 100BASE-TX triggering and analysis

A complete set of triggers, for specific MAC address, MAC length/type, MAC client data, IPv4 and TCP header content, TCP and IPv4 client data, and FCS errors, enables you to quickly capture the event of interest.

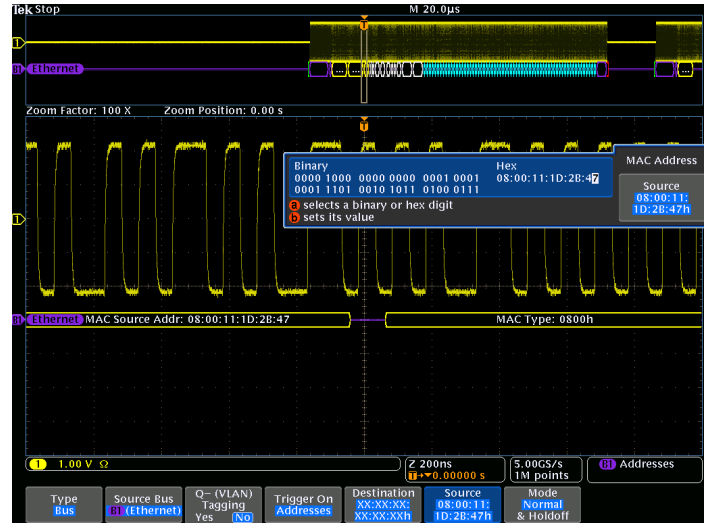


DPO4ENET triggering on a specific 10BASE-T MAC source address.

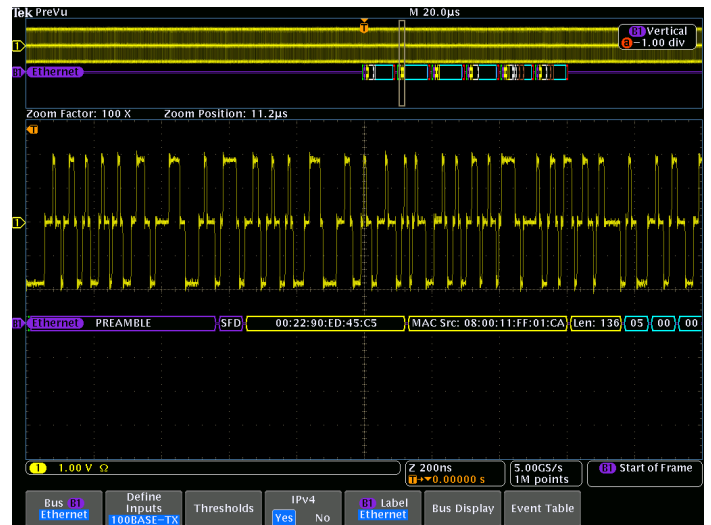

Color-coded DPO4ENET displays a 100BASE-TX serial signal, showing preamble, MAC addresses, IP header, and TCP header components.



## 10BASE-T and 100BASE-TX event table

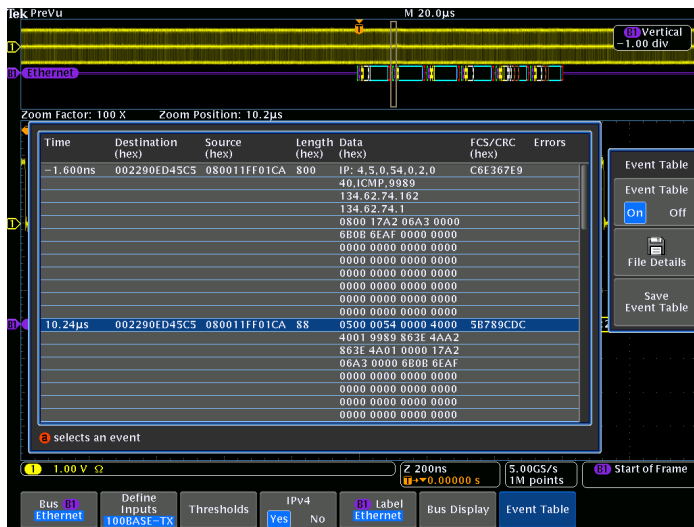

DPO4ENET 100BASE-TX event table displaying packet information with time stamp.

## Specifications

### CMENET3 Compliance test characteristics

General mask                      Autofit, Waveform/Sample Count.

#### Instrument compatibility

Ethernet standards	Recommended oscilloscopes for compliance testing (Windows 10 versions only)
10BASE-T 100BASE-TX 1000BASE-T	≥1 GHz models of MSO/DPO5000, DPO7000C, DPO/MSO70000C/DX/SX Series

#### 10BASE-T tests

Test	Details
Template	MAU Ext (and inverted), MAU Int (and inverted), Link Pulse, and TP_IDL
MAU Template Scale	0.9 and 1.1
Amplitude	Common mode output voltage
Return Loss	85, 100, 115 $\Omega$ <sup>1</sup>

#### 100BASE-TX tests

Test	Details
Template	Positive and negative polarity
Amplitude	Signal amplitude, amplitude symmetry, differential output voltage, waveform overshoot
Time domain tests	Rise time, fall time, rise/fall time symmetry
Jitter	Jitter and duty cycle distortion
Return Loss	85 $\Omega$ , 100 $\Omega$ , 115 $\Omega$

#### 1000BASE-T tests

Test	Details
Template	Points A, B, C, D, F, H
Amplitude	Peak voltage (points A, B) Level accuracy (points B, C, D) Droop (points G, J) Distortion (with and without TX_TCLK <sup>2</sup> ) Common mode output voltage
Disturber options	With and without disturber signal
Jitter	Master (filtered and unfiltered), Slave <sup>3</sup> (filtered and unfiltered)
Return loss	85 $\Omega$ , 100 $\Omega$ , 115 $\Omega$

<sup>1</sup> 85  $\Omega$  and 115  $\Omega$  plots require four-channel oscilloscopes.

<sup>2</sup> If clock inaccuracy is high, results may vary on some oscilloscopes due to limitations on the segmented memory acquisitions.

<sup>3</sup> Slave-filtered tests require four-channel oscilloscopes.

## SR-ENET Ethernet triggering and analysis test characteristics

### Instrument compatibility

Ethernet standards	Recommended oscilloscopes
10BASE-T 100BASE-TX	All models of MSO/DPO5000, DPO7000C, and DPO/DSA/MSO70000C/D/DX/SX Series

### Bus setup options

Option	Description
Ethernet compatibility	10BASE-T, 100BASE-TX
Sources	Analog channels 1-4 Math channels 1-4
Recommended probing	Differential
Available Address/data formats	Hex Binary Hex or ASCII: Data Mixed: Hex or ASCII data, other fields in decimal and hex.

### Bus decode options

Option	Description
Ethernet data rates	10BASE-T: 10 Mb/s 100BASE-TX: 100 Mb/s
Decode display	Start of Packet (green bar) Preamble (blue packet) Start of Frame Delimiter (blue packet) MAC Destination and Source Addresses (yellow packets) MAC Length/Type (blue packet) Data (cyan packet) IPv4 Header (white packet) TCP Header (brown packet) Frame Check Sequence/CRC (purple packet) End of Packet (red bar) Error (red packet)
Internet protocol support	IPv4
Transport layer protocol support	TCP

### Display mode options

Option	Description
Bus	Bus display on/off
Event Table	Decoded packet data in a tabular view



## SR-ENET Ethernet triggering and analysis test characteristics

### Bus trigger options

Option	Description
Trigger <sup>4</sup> and/or Search On	<ul style="list-style-type: none"> <li>• 10BASE-T:                             <ul style="list-style-type: none"> <li>○ Start Frame Delimiter</li> <li>○ MAC Addresses: Trigger on Source and Destination 48-bit address values</li> <li>○ MAC Q-tag Control Information: Trigger on Q-tag 32-bit value</li> <li>○ MAC Length/Type: Trigger on &lt;, =, &gt;, , a particular 16-bit value, or inside or outside of a range</li> <li>○ MAC Client Data: Trigger on &lt;, =, &gt;, , a particular 16-bit value, or inside or outside of a range. Selectable number of bytes to trigger on from 1-16. Byte offset options of Don't Care, 0-1499</li> <li>○ IPV4 Header: Trigger on IP header 8-bit value, Source Address, Destination Address</li> <li>○ TCP Header: Trigger on Destination Port, Source Port, Sequence Number, and Ack Number</li> <li>○ TCP/IPv4 Client Data: Trigger on &lt;, =, &gt;, , a particular data value, or inside or outside of a range. Selectable number of bytes to trigger on from 1-16. Byte offset options of Don't Care, 0-1499</li> <li>○ End of Packet</li> <li>○ FCS (CRC) Error</li> </ul> </li> <li>• 100BASE-TX:                             <ul style="list-style-type: none"> <li>○ Start Frame Delimiter</li> <li>○ MAC Addresses: Trigger on Source and Destination 48-bit address values</li> <li>○ MAC Q-tag Control Information: Trigger on Q-tag 32-bit value</li> <li>○ MAC Length/Type: Trigger on &lt;, =, &gt;, , a particular 16-bit value, or inside or outside of a range</li> <li>○ IPV4 Header: Trigger on IP header 8-bit value, Source Address, Destination Address</li> <li>○ TCP Header: Trigger on Destination Port, Source Port, Sequence Number, and Ack Number</li> <li>○ MAC Client Data: Trigger on &lt;, =, &gt;, , a particular data value, or inside or outside of a range. Selectable number of bytes to trigger on from 1-16. Byte offset options of Don't Care, 0-1499</li> <li>○ TCP/IPv4 Client Data: Trigger on &lt;, =, &gt;, , a particular data value, or inside or outside of a range. Selectable number of bytes to trigger on from 1-16. Byte offset options of Don't Care, 0-1499</li> <li>○ End of Packet</li> <li>○ FCS (CRC) Error</li> <li>○ Idle</li> </ul> </li> </ul>

## DPO4ENET Ethernet triggering and analysis test characteristics

### Instrument compatibility

Ethernet standards	Recommended oscilloscopes
10BASE-T 100BASE-TX	≥350 MHz models of MSO/DPO4000B and MDO4000 Series
10BASE-T	All models of MSO/DPO4000B and MDO4000 Series

<sup>4</sup> Ethernet triggering available on MSO/DPO5000 Series only

## DPO4ENET Ethernet triggering and analysis test characteristics

### Bus setup options

Option	Description
Ethernet compatibility	10BASE-T, 100BASE-TX
Sources	Single-ended: Analog channels 1-4 Differential: Analog channels 1-4 Math channel Reference channels 1-4 Recommended Probing 10BASE-T: Single-ended or differential
Recommended probing	10BASE-T: Single-ended or differential 100BASE-TX: Differential
Thresholds presets	10BASE-T <ul style="list-style-type: none"> <li>• Single-ended (D+ 1.25 V; D- 1.25 V)</li> <li>• Differential (High 1.25 V; Low -1.25 V)</li> </ul> 100BASE-TX <ul style="list-style-type: none"> <li>• Single-ended (D+ 500 mV; D- 500 mV)</li> <li>• Differential (High 500 mV; Low -500 mV)</li> </ul>
Address/data formats available	Hex Binary Hex or ASCII: Data Decimal and Hex: Other Fields

### Bus decode options

Option	Description
Ethernet data rates	10BASE-T: 10 Mb/s 100BASE-TX: 100 Mb/s
Decode display	Start (green bar) MAC Address (yellow packet) Data (cyan packet) IPv4 Header (white packet) TCP Header (brown packet) CRC (purple packet) Stop (red bar) Error (red packet)
Internet protocol support	IPv4
Transport layer protocol support	TCP

### Display mode options

Mode	Description
Bus	Bus only
Bus and Waveforms	Simultaneous display of bus and digital waveforms
Event Table	Decoded packet data in a tabular view

**DPO4ENET Ethernet triggering and analysis test characteristics**

**Bus trigger options**

Option	Description
Trigger and/or Search On	<ul style="list-style-type: none"> <li>• 10BASE-T:                             <ul style="list-style-type: none"> <li>○ Start Frame Delimiter</li> <li>○ MAC Addresses: Trigger on Source and Destination 48-bit address values</li> <li>○ MAC Q-tag Control Information: Trigger on Q-tag 32-bit value</li> <li>○ MAC Length/Type: Trigger on <math>\leq</math>, <math>&lt;</math>, <math>=</math>, <math>&gt;</math>, <math>\geq</math>, <math>\neq</math> a particular 16-bit value, or inside or outside of a range</li> <li>○ MAC Client Data: Trigger on <math>\leq</math>, <math>&lt;</math>, <math>=</math>, <math>&gt;</math>, <math>\geq</math>, <math>\neq</math> a particular 16-bit value, or inside or outside of a range. Selectable number of bytes to trigger on from 1-16. Byte offset options of Don't Care, 0-1499</li> <li>○ IP Header: Trigger on IP header 8-bit value, Source Address, Destination Address</li> <li>○ TCP Header: Trigger on Destination Port, Source Port, Sequence Number, and Ack Number</li> <li>○ TCP/IPv4 Client Data: Trigger on <math>\leq</math>, <math>&lt;</math>, <math>=</math>, <math>&gt;</math>, <math>\geq</math>, <math>\neq</math> a particular data value, or inside or outside of a range. Selectable number of bytes to trigger on from 1-16. Byte offset options of Don't Care, 0-1499</li> <li>○ End of Packet</li> <li>○ FCS (CRC) Error</li> </ul> </li>   <li>• 100BASE-TX:                             <ul style="list-style-type: none"> <li>○ Start Frame Delimiter</li> <li>○ MAC Addresses: Trigger on Source and Destination 48-bit address values</li> <li>○ MAC Q-tag Control Information: Trigger on Q-tag 32-bit value</li> <li>○ MAC Length/Type: Trigger on <math>\leq</math>, <math>&lt;</math>, <math>=</math>, <math>&gt;</math>, <math>\geq</math>, <math>\neq</math> a particular 16-bit value, or inside or outside of a range</li> <li>○ MAC Client Data: Trigger on <math>\leq</math>, <math>&lt;</math>, <math>=</math>, <math>&gt;</math>, <math>\geq</math>, <math>\neq</math> a particular data value, or inside or outside of a range. Selectable number of bytes to trigger on from 1-16. Byte offset options of Don't Care, 0-1499</li> <li>○ IP Header: Trigger on IP header 8-bit value, Source Address, Destination Address</li> <li>○ TCP Header: Trigger on Destination Port, Source Port, Sequence Number, and Ack Number</li> <li>○ TCP/IPv4 Client Data: Trigger on <math>\leq</math>, <math>&lt;</math>, <math>=</math>, <math>&gt;</math>, <math>\geq</math>, <math>\neq</math> a particular data value, or inside or outside of a range. Selectable number of bytes to trigger on from 1-16. Byte offset options of Don't Care, 0-1499</li> <li>○ End of Packet</li> <li>○ FCS (CRC) Error</li> <li>○ Idle</li> </ul> </li> </ul>

## Ordering information

### Recommended probes

Probes	Recommended	Quantity
Differential probe	TDP3500	Two <sup>5</sup>
	TDP1500	
	P6247 <sup>6</sup>	
	P6248	

### TekExpress Ethernet (10BASE-T/100BASE-TX/1000BASE-T) compliance test application

Model	New instrument orders	Product upgrades	Floating licenses
MSO/DPO5000 Series	Opt. CMENET3	DPO-UP CMENET3	DPOFL-CMENET3
DPO7000C Series	Opt. CMENET3	DPO-UP CMENET3	DPOFL-CMENET3
DPO/DSA/MSO7000C/D/DX/SX Series	Opt. CMENET3	DPO-UP CMENET3	DPOFL-CMENET3

Existing ET3 users can upgrade their system to TekExpress Ethernet by ordering Opt. DPO-UP CMENET3A

### Ethernet test fixtures

Fixture	Description
TF-GBE-BTP	Basic Ethernet Test Package
TF-GBE-ATP	Advanced Ethernet Test Package, includes Jitter Channel
TF-GBE-JTC	103-meter 1000BASE-T Jitter Test Channel Cable
TF-GBE-SIC	Short (4 inch or 0.1 meter) RJ-45 Interconnect Cable

### Signal source (for return loss and disturbing signal tests)

**Arbitrary Function Generator**      AFG31000 (recommended), AFG31252, AFG31152, AFG31102, and AFG3000 Series

**Arbitrary Waveform Generator**      AWG5200, AWG5000C, AWG7000C, AWG7000C Series

### SR-ENET 10BASE-T and 100BASE-TX triggering and analysis application

Model	New instrument orders	Product upgrades	Floating licenses
MSO/DPO5000 Series	Opt. SR-ENET	DPO-UP SR-ENET	DPOFL-SR-ENET
DPO7000C Series	Opt. SR-ENET	DPO-UP SR-ENET	DPOFL-SR-ENET
DPO/DSA/MSO70000 C/D/DX/SX Series	Opt. SR-ENET	DPO-UP SR-ENET	DPOFL-SR-ENET

### DPO4ENET 10BASE-T and 100BASE-TX triggering and analysis application

Model	New instrument orders	Product upgrades	Floating licenses
MDO4000 Series	DPO4ENET	DPO4ENET	-

<sup>5</sup> For 1000BASE-T Slave jitter testing, an additional differential probe is required.

<sup>6</sup> For P6247/8, use the appropriate TPA-BNC adapter.

## Additional information

Tektronix offers wide range of solutions for Ethernet testing, including 10GBASE-T, 50G, 100G, 200G, and 400G Ethernet. To view the comprehensive listing, and download the latest resources, [www.tek.com/100g-optical-and-electrical-tx-rx](http://www.tek.com/100g-optical-and-electrical-tx-rx).



Tektronix is registered to ISO 9001 and ISO 14001 by SRI Quality System Registrar.



Product(s) complies with IEEE Standard 488.1-1987, RS-232-C, and with Tektronix Standard Codes and Formats.



Product Area Assessed: The planning, design/development and manufacture of electronic Test and Measurement instruments.

**ASEAN / Australasia** (65) 6356 3900  
**Belgium** 00800 2255 4835\*  
**Central East Europe and the Baltics** +41 52 675 3777  
**Finland** +41 52 675 3777  
**Hong Kong** 400 820 5835  
**Japan** 81 (3) 6714 3086  
**Middle East, Asia, and North Africa** +41 52 675 3777  
**People's Republic of China** 400 820 5835  
**Republic of Korea** +822 6917 5084, 822 6917 5080  
**Spain** 00800 2255 4835\*  
**Taiwan** 886 (2) 2656 6688

**Austria** 00800 2255 4835\*  
**Brazil** +55 (11) 3759 7627  
**Central Europe & Greece** +41 52 675 3777  
**France** 00800 2255 4835\*  
**India** 000 800 650 1835  
**Luxembourg** +41 52 675 3777  
**The Netherlands** 00800 2255 4835\*  
**Poland** +41 52 675 3777  
**Russia & CIS** +7 (495) 6647564  
**Sweden** 00800 2255 4835\*  
**United Kingdom & Ireland** 00800 2255 4835\*

**Balkans, Israel, South Africa and other ISE Countries** +41 52 675 3777  
**Canada** 1 800 833 9200  
**Denmark** +45 80 88 1401  
**Germany** 00800 2255 4835\*  
**Italy** 00800 2255 4835\*  
**Mexico, Central/South America & Caribbean** 52 (55) 56 04 50 90  
**Norway** 800 16098  
**Portugal** 80 08 12370  
**South Africa** +41 52 675 3777  
**Switzerland** 00800 2255 4835\*  
**USA** 1 800 833 9200

\* European toll-free number. If not accessible, call: +41 52 675 3777

**For Further Information.** Tektronix maintains a comprehensive, constantly expanding collection of application notes, technical briefs and other resources to help engineers working on the cutting edge of technology. Please visit [www.tek.com](http://www.tek.com).

Copyright © Tektronix, Inc. All rights reserved. Tektronix products are covered by U.S. and foreign patents, issued and pending. Information in this publication supersedes that in all previously published material. Specification and price change privileges reserved. TEKTRONIX and TEK are registered trademarks of Tektronix, Inc. All other trade names referenced are the service marks, trademarks, or registered trademarks of their respective companies.

