


Active FET Probe

P6205 Datasheet

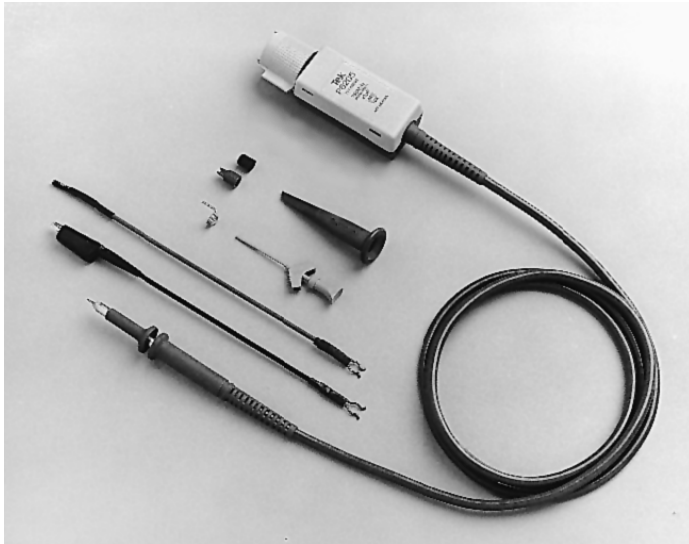

The P6205 probe is part of Tektronix' line of Low Circuit Loading Signal Acquisition probes for CSA (Communications Signal Analyzers), DSA (Digitizing Signal Analyzers), 11000 Series and the TDS family of oscilloscopes.

Key features

- DC to 750 MHz
- 2 pF Input C
- 1 M Ω Input R
- Integral Probe Power TekProbe™ BNC
- High-speed Digital Systems Design
 - ECL
 - GaAs
 - MOS: CMOS; FastCMOS; BiCMOS; TTL
- Component Design/Characterization
 - Amplitude Levels
 - Aberrations
 - Propagation Delay and Timing
 - Bandwidths and Rise Times

- Educational Research
- Manufacturing Engineering and Test

Active FET probes for TekProbe™ BNC interface

The P6205 is designed with FET devices for its inputs, which allows very high input resistance values and low input capacitances.

Both Active FET probes provide a wide linear dynamic input range for accessing most digital device families using today's logic voltage levels.

Power for the P6205 is supplied by the CSA, DSA, TDS and 11000 Series mainframes through the TekProbe BNC Interface, eliminating the need for extra cabling and/or external power supplies.

Probe information such as type, serial number, attenuation factor, offset scale factor, input resistance, and termination resistance required is communicated through the TekProbe interface between the Active Probe and the CSA, DSA, and 11000 Series mainframes. This information is used by these oscilloscope mainframes during the initialization sequence and measurement analysis.

Benefits

- Low Input C, High Input R - Minimizes circuit under test loading
- Probe Power Directly from CSA, DSA, TDS, or 11000 Series TekProbe™ BNC Interfaces - Means no additional cables or power supplies required
- Readout Coding for 10X Attenuation - Reduces confusion and errors in measurement readings
- Gold-plated Replaceable Probe Tips - Improved electrical connections and lower maintenance costs
- Miniature Size Accessories - Provides wide range of circuit attachments
- UL Listed - UL 1244

Specifications

All specifications are guaranteed unless noted otherwise. All specifications apply to all models unless noted otherwise.

Warranted electrical characteristics

Attenuation	10X
-------------	-----

Nominal electrical characteristics

Cable length	1.5 m (60 in) tip to BNC
--------------	--------------------------

Bandwidth at -3 dB	750 MHz
--------------------	---------

Input capacitance	2 pF
-------------------	------

Input resistance	1 M Ω
------------------	--------------

Linear dynamic range	± 10 V
----------------------	------------

DC offset range	NA
-----------------	----

Maximum input voltage	± 40 V (DC + peak AC)
-----------------------	---------------------------

Interface/Readout/Identity	TekProbe™ BNC / Yes / No
----------------------------	--------------------------

Recommended instruments ¹	11000 ² , TDS400, TDS500, TDS600, TDS700, TDS3000, TDS5000, TDS7000
--------------------------------------	--

¹ The P6205 also works with other instruments with appropriate adapters. Please visit <http://www.Tek.com/probes> for more details.

² 1100 Series = 11A32/11A34/11A52/11A71/11A72/11A81

Ordering information

Standard accessories

P6205 10x, 750 MHz active FET probe

013-0107-xx	Retractable hook tip
196-3120-xx	6 in. ground lead with alligator
196-3198-xx	6 in. ground lead with square-pin receptacle
214-4125-xx	Ground contact, spring
206-0569-xx	SMT KlipChip™ adapter
166-0404-xx	Insulating ground cover
015-0201-xx	IC test tip
016-0156-xx	Carrying case
070-8202-xx	Instruction manual

Warranty

One-year warranty covering all parts and labor.

Recommended accessories

Please see 5 mm Probe Accessories (miniature) probe system at <http://www.tek.com/datasheet/probe-accessories-2>



Tektronix is registered to ISO 9001 and ISO 14001 by SRI Quality System Registrar.

ASEAN / Australasia (65) 6356 3900
Belgium 00800 2255 4835*
Central East Europe and the Baltics +41 52 675 3777
Finland +41 52 675 3777
Hong Kong 400 820 5835
Japan 81 (3) 6714 3010
Middle East, Asia, and North Africa +41 52 675 3777
People's Republic of China 400 820 5835
Republic of Korea +822 6917 5084, 822 6917 5080
Spain 00800 2255 4835*
Taiwan 886 (2) 2656 6688

Austria 00800 2255 4835*
Brazil +55 (11) 3759 7627
Central Europe & Greece +41 52 675 3777
France 00800 2255 4835*
India 000 800 650 1835
Luxembourg +41 52 675 3777
The Netherlands 00800 2255 4835*
Poland +41 52 675 3777
Russia & CIS +7 (495) 6647564
Sweden 00800 2255 4835*
United Kingdom & Ireland 00800 2255 4835*

Balkans, Israel, South Africa and other ISE Countries +41 52 675 3777
Canada 1 800 833 9200
Denmark +45 80 88 1401
Germany 00800 2255 4835*
Italy 00800 2255 4835*
Mexico, Central/South America & Caribbean 52 (55) 56 04 50 90
Norway 800 16098
Portugal 80 08 12370
South Africa +41 52 675 3777
Switzerland 00800 2255 4835*
USA 1 800 833 9200

* European toll-free number. If not accessible, call: +41 52 675 3777

For Further Information. Tektronix maintains a comprehensive, constantly expanding collection of application notes, technical briefs and other resources to help engineers working on the cutting edge of technology. Please visit www.tek.com.

Copyright © Tektronix, Inc. All rights reserved. Tektronix products are covered by U.S. and foreign patents, issued and pending. Information in this publication supersedes that in all previously published material. Specification and price change privileges reserved. TEKTRONIX and TEK are registered trademarks of Tektronix, Inc. All other trade names referenced are the service marks, trademarks, or registered trademarks of their respective companies.



12 Feb 2016 60W-14842-2

